

ADW300

Wireless

Metering Instrument



ADW300 wireless meter is mainly used to measure three-phase active power in low-voltage network.

Functions

Function	Description
LCD display	8 digits
Measurement of Energy	kWh (positive and negative) kvarh (positive and negative) A, B, C phase positive kWh
Electrical parameters	U、I、P、Q、S、PF、Hz
Harmonic	2~31ST Voltage and current harmonic
Key programming	4 keys to communication and set parameters
Temperature measurement	A, B, C, N four-way temperature measurement (optional T)
DI /DO	4DI/2DO(Selection of K)
After-current	1-channel
Communication	Infrared RS485 (Optional: C) 470MHz Wireless Transmission (Optional: LR) GPRS Communication (Optional: 2G) NB-IOT Communication (Optional: NB)

Electrical Performance



Input voltage	Nominal voltage	3 × 220/380V, 3 × 380V, 3 × 57.7/100V, 3 × 100V
	frequency	50Hz~60Hz
	consumption	<10VA or 2W (A phase), <0.5VA (B phase, C phase)
Input current	Maximum Current	6A
	Starting current	0.002A
	consumption	<2VA
	Accuracy	Class 0.5S
	Temperature Accuracy	± 2°C
Pulse	Width	80 ± 20ms
	Constant	6400imp/kWh

Working Environment


Temperature	Working	-25°C~55°C
	Storing	-40°C~70°C
Humidity	≤95%(No condensation)	
Altitude	<2000m	

Dimensions drawings


ADW300 Dimension Diagram

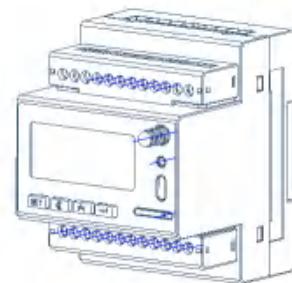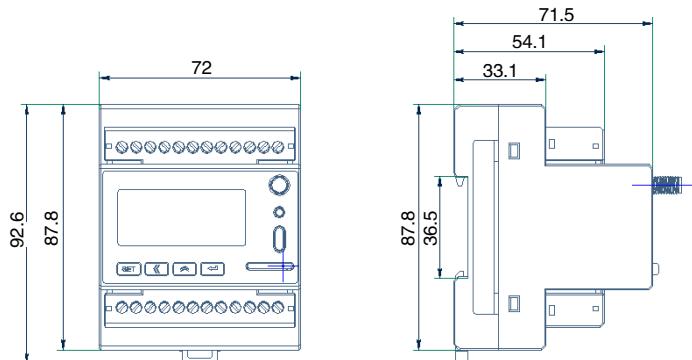


Wiring

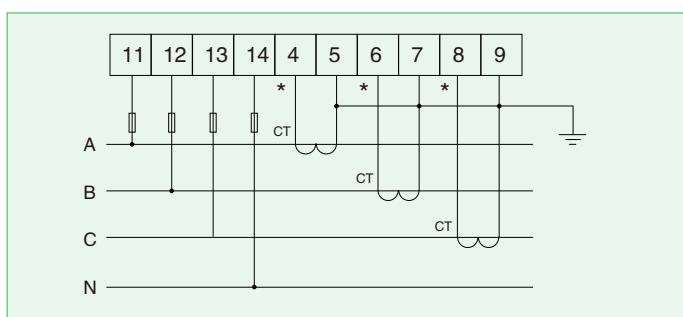

Three-phase four-wire

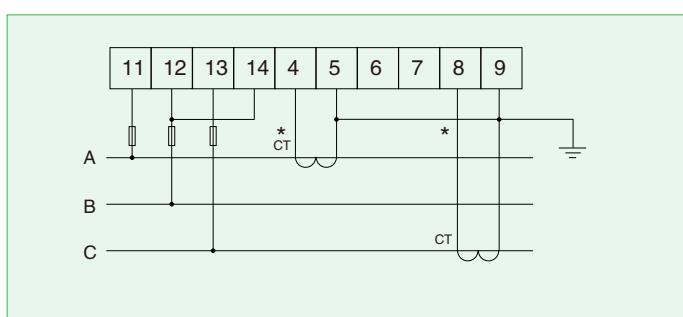


Three-phase three-wire

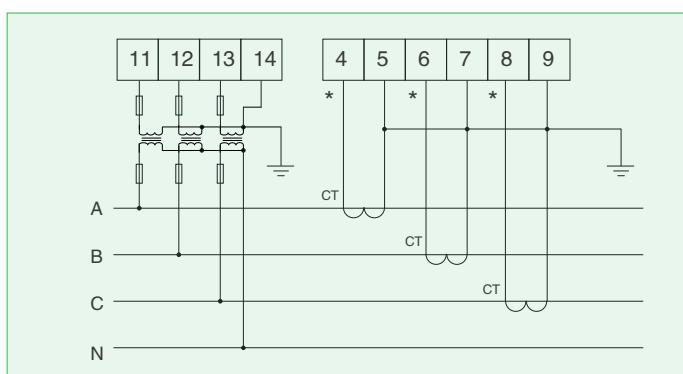


Three-phase four-wire

Voltage access via PT

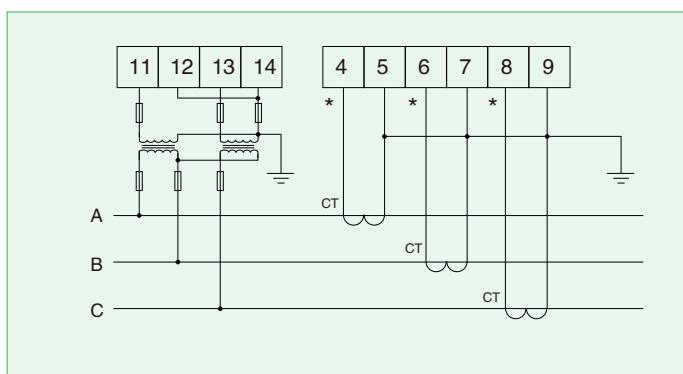


Three-phase three-wire

■ ADW300W Wiring instructions

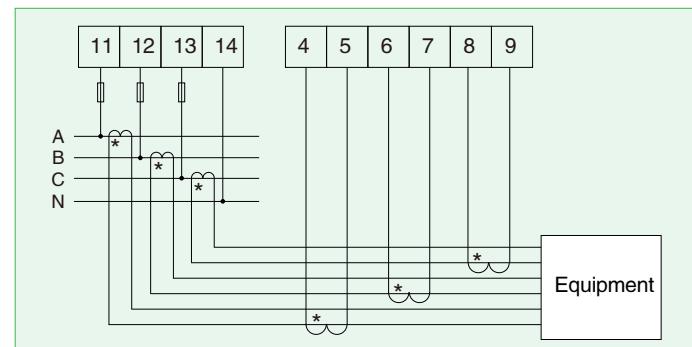

Three-phase four-wire

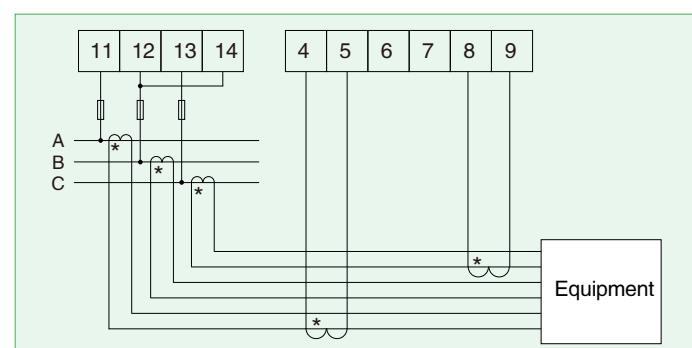

Three-phase three-wire

Display examples

■ Energy



■ Voltage



■ Current



■ Power

